

AERODROME
CHART - ICAO

ARP 571209N 0021153W



AD ELEV 215FT

ABERDEEN/DYCE
EGPD

LIGHTING		
THR 16/34 THR 23	Green with green W bars. White.	
RWY 16/34 RWY 23	HI bi-d colour coded C/L(15m spacing). Variable intensity bi-d edge. End lights red. White omni-d edge. Yellow touchdown square.	
TWY	Main taxiway green C/L, others blue edge lights/reflective markers.	
COM		
ATIS	121.855 (114.3 VOR ADN)	ABERDEEN INFO
TWR	118.105	ABERDEEN TOWER
	121.705 (GMC)	ABERDEEN GROUND
	121.600	ABERDEEN FIRE

GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position.	
BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET	
ELEVATIONS IN FEET AMSL HEIGHTS IN FEET ABOVE AD	324 (109)

VAR 1.7°W - 2019
N
Annual Rate
of Change 0.18°E

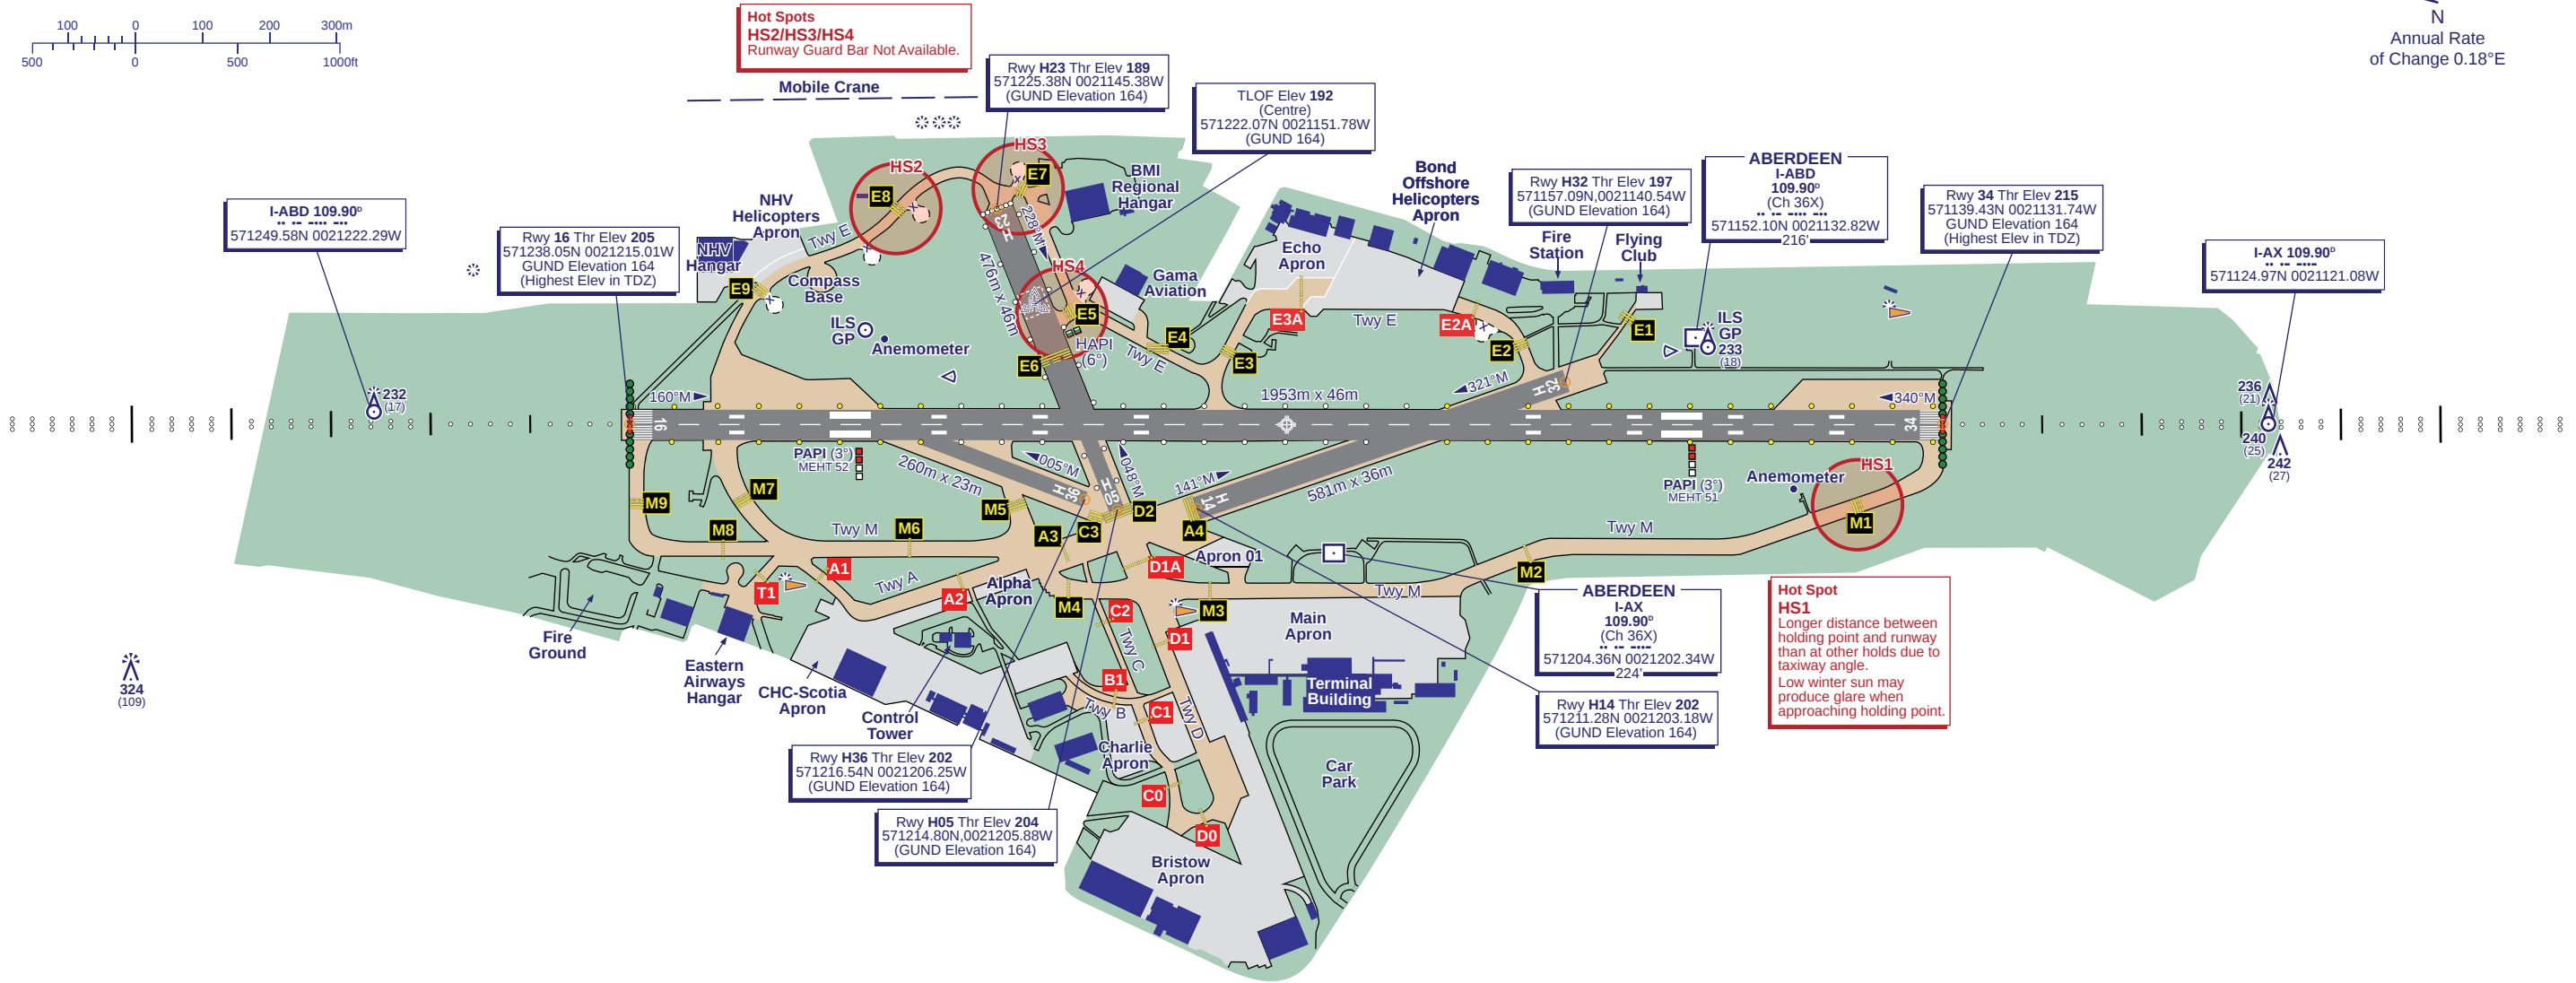

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS			
APRON / RWY / TWY	SURFACE	BEARING STRENGTH	ELEVATION
RWY 16/34	Grooved Asphalt	56/F/B/X/T	-
RWY H05/23	Asphalt	-	-
RWY H14/32	Asphalt	-	-
RWY H36	Asphalt	-	-
Main Apron	Concrete	-	-
Echo Apron	Concrete/Asphalt	-	-
Main Taxiway	Concrete	-	-

CHANGE (10/18): MAG VAR. RUNWAY H05/H23 HEADINGS. COM FREQUENCIES.