
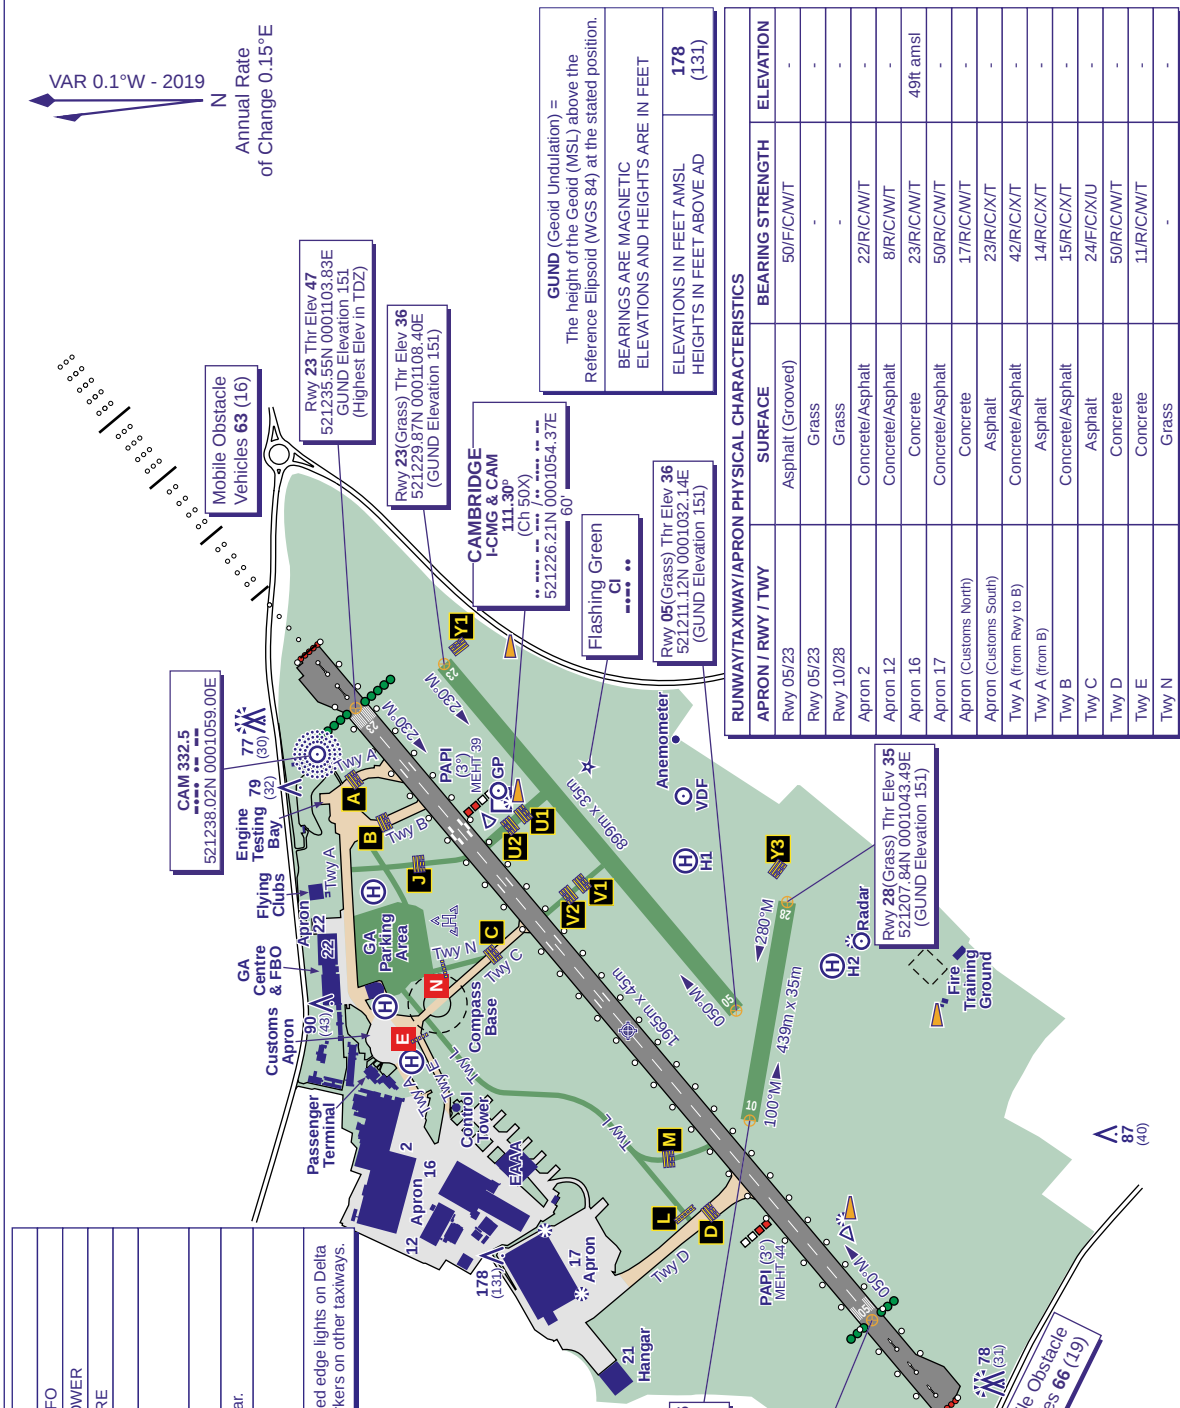


COM		
ATIS	134.605	CAMBRIDGE INFO
TWR	125.905	CAMBRIDGE TOWER
	121.600	CAMBRIDGE FIRE
LIGHTING		
APCH 05	420m HI C/L with 1 bar.	
APCH 23	900m HI coded C/L with 5 bars.	
THR 05	Elev HI W bars.	
THR 23	Elev HI W bars. Flush green threshold bar.	
RWY 05/23	Elev HI bi-d with LI omni-d component. Flush HI bi-d red end lights.	
TWY	Taxiway centre-line marking. Blue elevated edge lights on Delta and Charlie taxiways, blue reflective markers on other taxiways.	



GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position.		
BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET		
ELEVATIONS IN FEET AMSL	178	
HEIGHTS IN FEET ABOVE AD	(131)	

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS

APRON / RWY / TWY	SURFACE	BEARING STRENGTH	ELEVATION
Rwy 05/23	Asphalt (Grooved)	50/F/C/W/T	-
Rwy 05/23	Grass	-	-
Rwy 10/28	Grass	-	-
Apron 2	Concrete/Asphalt	22/R/C/W/T	-
Apron 12	Concrete/Asphalt	8/R/C/W/T	-
Apron 16	Concrete	23/R/C/W/T	49ft amsl
Apron 17	Concrete/Asphalt	50/R/C/W/T	-
Apron (Customs North)	Concrete	17/R/C/W/T	-
Apron (Customs South)	Asphalt	23/R/C/X/T	-
Twy A (from Rwy to B)	Concrete/Asphalt	42/R/C/X/T	-
Twy A (from B)	Asphalt	14/R/C/X/T	-
Twy B	Concrete/Asphalt	15/R/C/X/T	-
Twy C	Asphalt	24/F/C/X/U	-
Twy D	Concrete	50/R/C/W/T	-
Twy E	Concrete	11/R/C/W/T	-
Twy N	Grass	-	-