


COM		
ATIS	131.350	EDINBURGH TERMINAL INFO
TWR	118.700	EDINBURGH TOWER
	121.750 (GMC)	EDINBURGH GROUND
	121.600	EDINBURGH FIRE
LIGHTING		
TWY	Green C/L on 06/24 taxiways and from TWY M to North/Southeast and East aprons. Blue edge for all other taxiways. RWY 06/24 exits have Alt green/yellow lights to CAT II/III stop bars. RWY guard lights on accesses to RWY 06/24.	

BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET	
ELEVATIONS IN FEET AMSL	216
HEIGHTS IN FEET ABOVE AD	(80)

STAND	COORDINATES	STAND	COORDINATES	STAND	COORDINATES	STAND	COORDINATES
1	555647.68N 0032157.07W	10	555657.24N 0032148.18W	27	555651.22N 0032120.32W	205	555706.49N 0032114.31W
1A	555646.06N 0032157.70W	10A	555657.16N 0032148.40W	28	555650.53N 0032118.08W	206	555705.55N 0032112.67W
1B	555644.61N 0032157.66W	11	555658.08N 0032145.79W	29	555649.82N 0032115.82W	207	555704.97N 0032110.74W
2	555649.31N 0032156.89W	12	555658.92N 0032143.48W	30	555649.13N 0032113.54W	208	555704.19N 0032108.20W
2A	555649.24N 0032156.75W	14	555659.63N 0032143.74W	31	555648.79N 0032111.07W	209	555704.20N 0032108.20W
3	555651.08N 0032156.95W	15A	555700.40N 0032137.44W	32	555648.10N 0032108.80W	210	555701.29N 0032053.58W
3A	555651.16N 0032157.43W	15	555700.16N 0032139.88W	33	555647.30N 0032110.78W	211	555700.37N 0032050.56W
4	555652.85N 0032157.82W	15B	555700.99N 0032140.02W	34	555646.03N 0032112.03W	212	555659.42N 0032047.47W
4A	555652.36N 0032157.13W	16A	555657.68N 0032136.26W	99	555645.40N 0032206.50W	308	To be surveyed
5	555654.08N 0032158.08W	16	555658.12N 0032138.19W	100	555645.85N 0032207.04W	309	555645.20N 0032101.44W
6	555654.56N 0032157.43W	16B	555658.70N 0032138.09W	101	555646.32N 0032206.52W	310R	555645.83N 0032059.69W
7	555655.29N 0032155.28W	17	To be surveyed	102	555647.53N 0032207.60W	310	555645.96N 0032059.22W
8	555656.20N 0032153.40W	18	To be surveyed	103	555649.29N 0032207.63W	311R	555646.43N 0032057.92W
9	555656.59N 0032150.86W	19	To be surveyed	104	555650.71N 0032208.24W	311	555646.71N 0032056.99W
9A	555656.86N 0032151.51W	20	555654.27N 0032131.62W	105	555652.12N 0032208.80W	311L	555647.04N 0032056.14W
		21	555653.89N 0032131.41W	106	555654.16N 0032209.32W	312	555647.46N 0032054.78W
		22	555653.60N 0032129.43W	200	555709.20N 0032124.68W	312L	555647.64N 0032054.36W
		23	555652.71N 0032128.29W	201	555708.64N 0032122.80W	313	555648.21N 0032052.56W
		24	555652.92N 0032127.20W	202	555708.06N 0032120.92W	314	555648.96N 0032050.34W
		25	555652.25N 0032125.01W	203	555707.77N 0032118.51W	315	555649.72N 0032048.12W
		26	555652.08N 0032122.09W	204	555707.14N 0032116.44W	316	555650.47N 0032045.90W

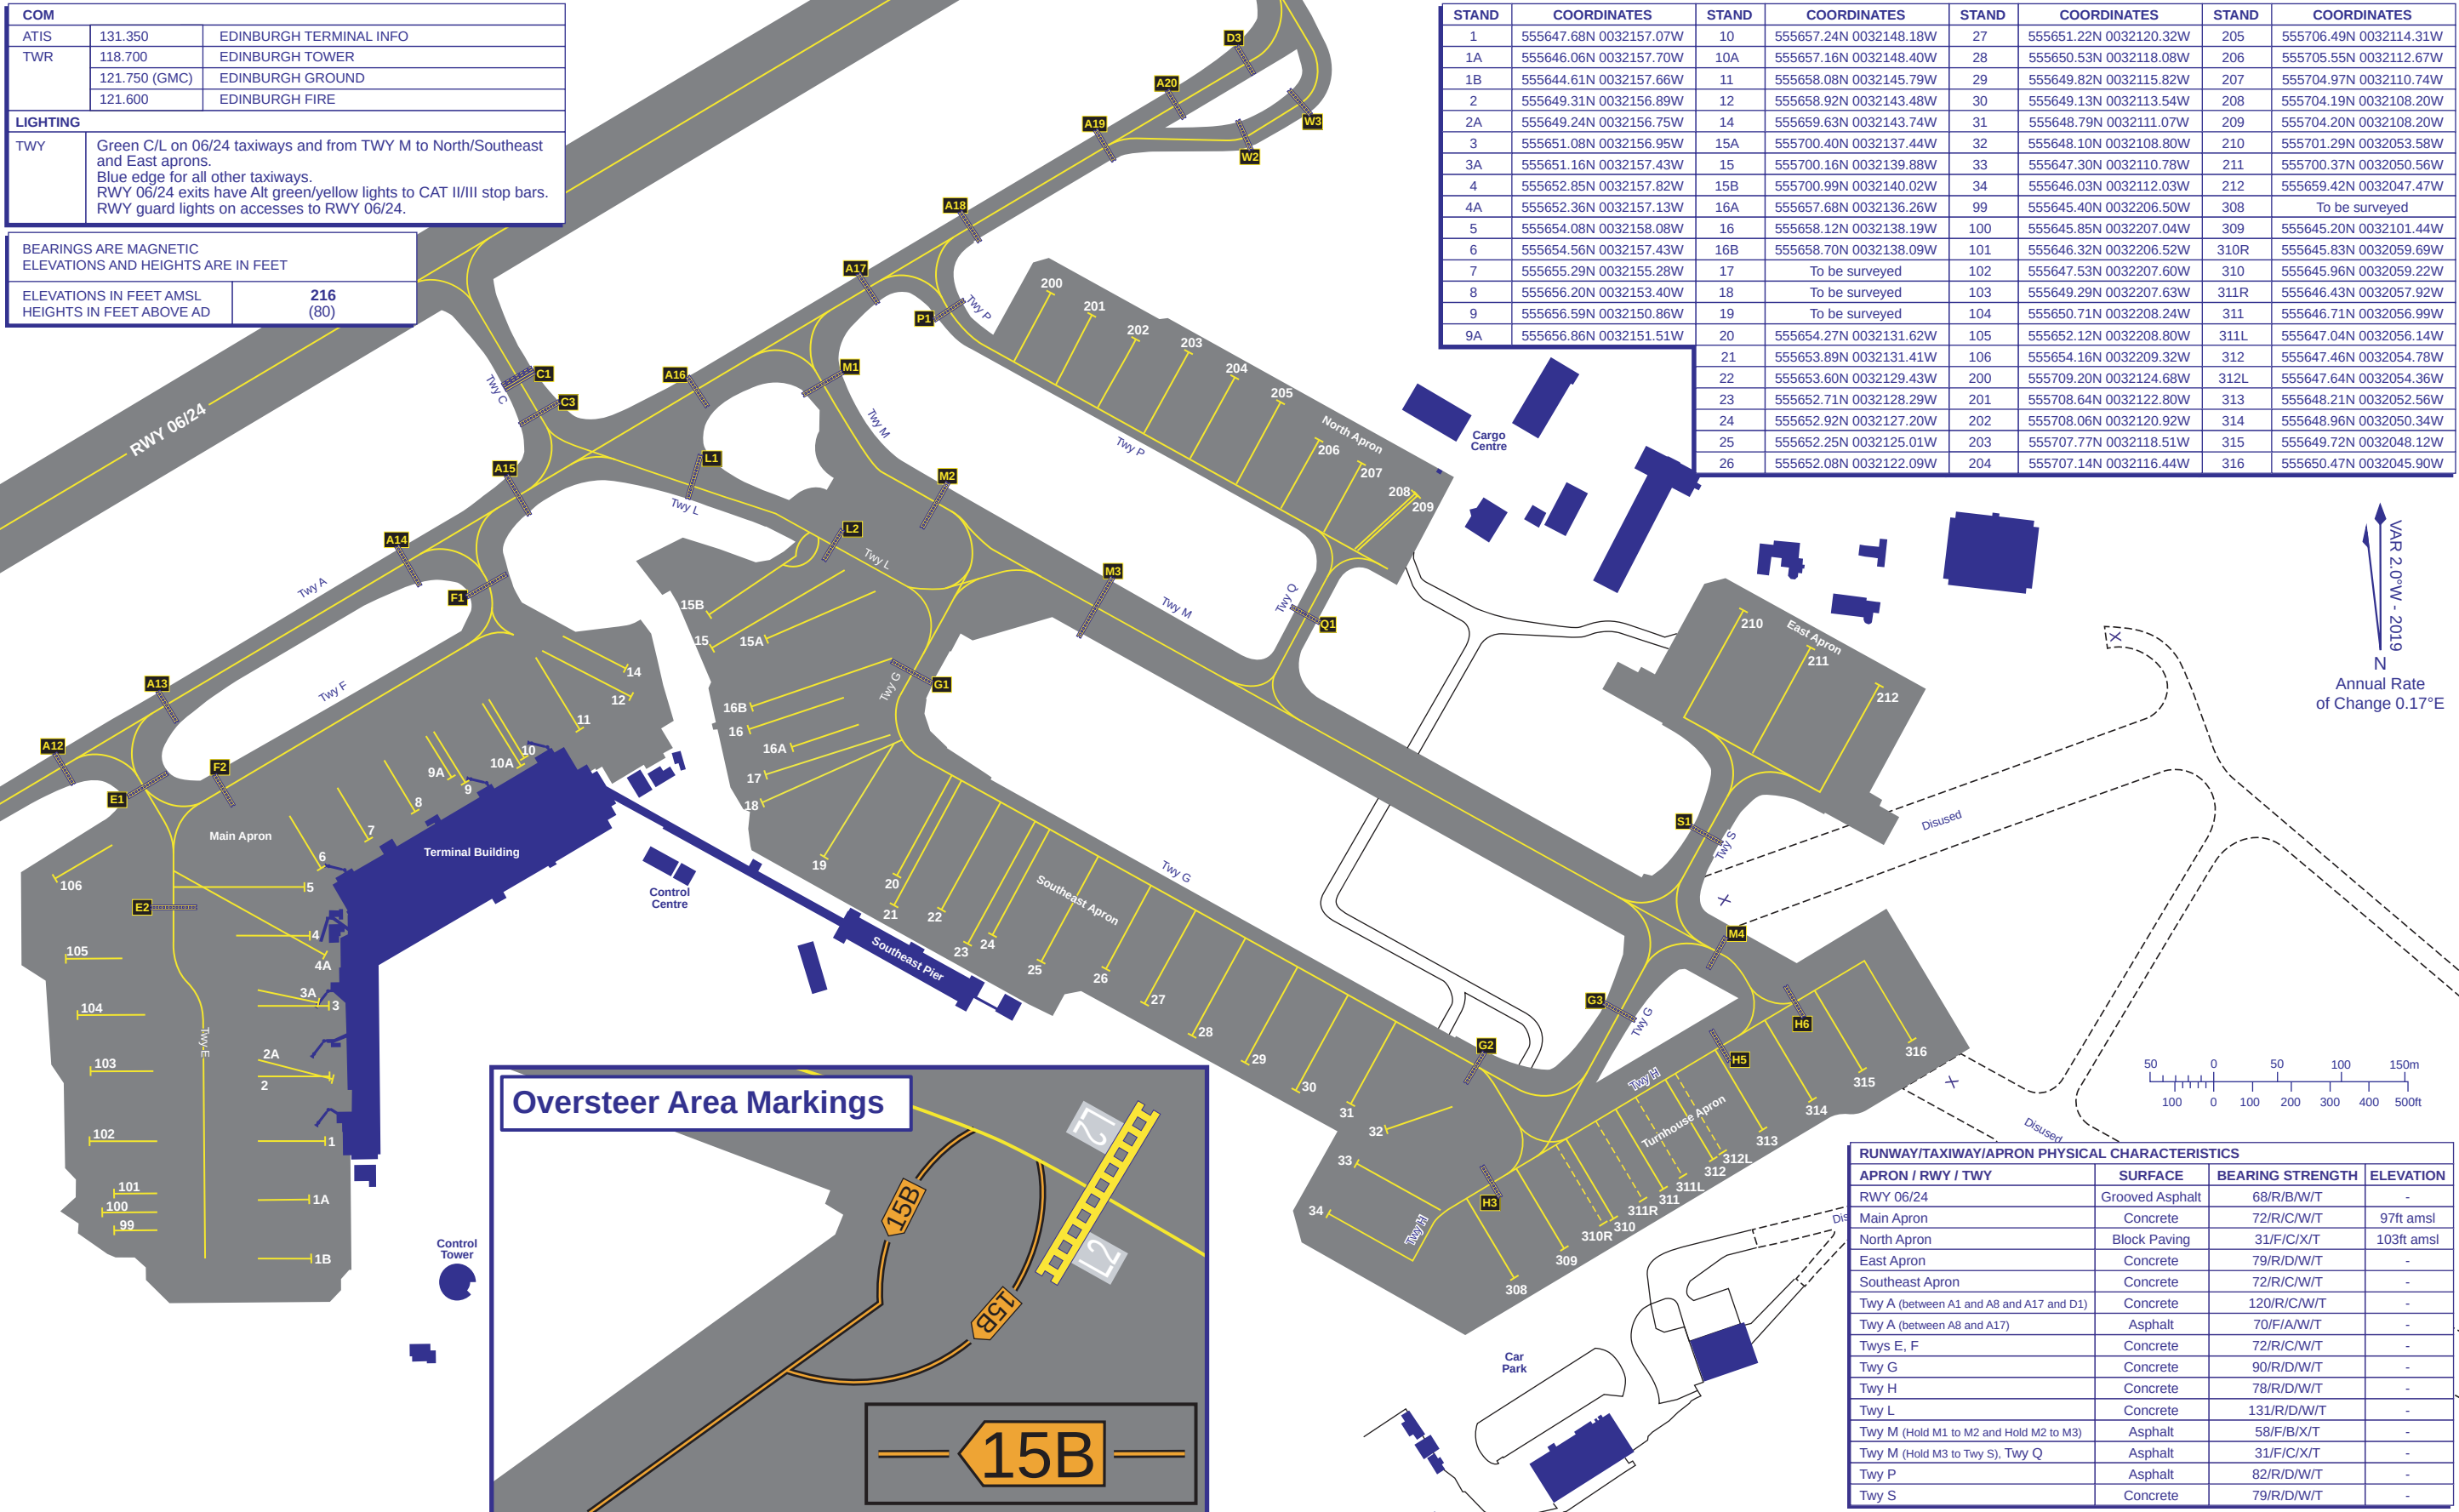

CHANGE (4/19): NEW APRON/STANDS 308/309/310/310R/311/311R/311L/312/312L/313/314/315/316. TWY H BEARING STRENGTH. HOLD H1 REMOVED. HOLDS G3/H3/H5/H6/M4 ADDED.