
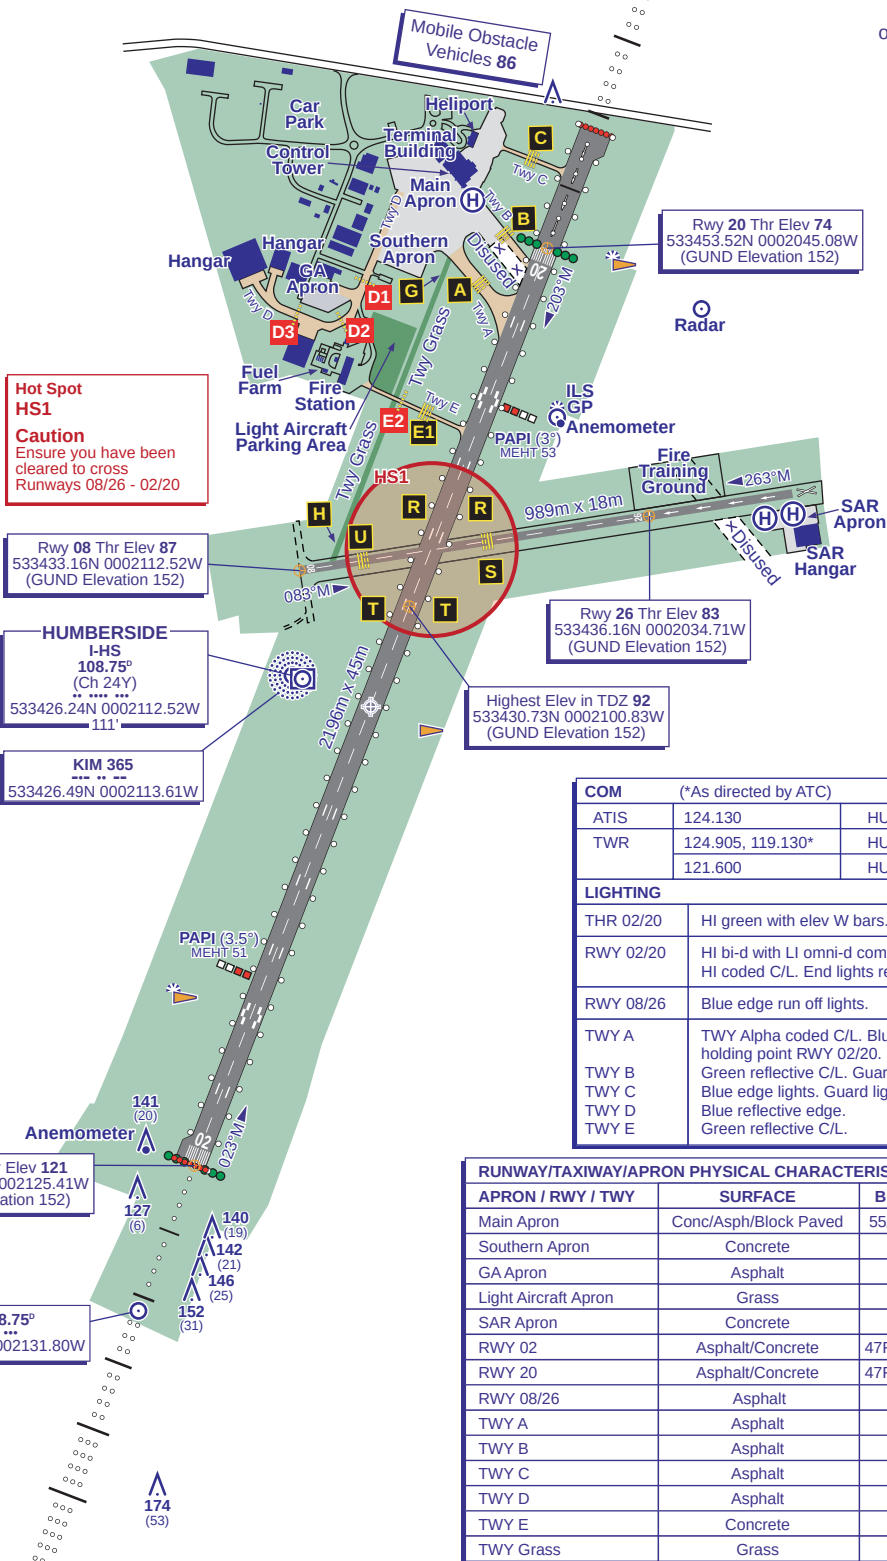


GUND (Geoid Undulation) =The height of the Geoid (MSL) above the
Reference Ellipsoid (WGS 84) at the stated position.BEARINGS ARE MAGNETIC
ELEVATIONS AND HEIGHTS ARE IN FEETELEVATIONS IN FEET AMSL
HEIGHTS IN FEET ABOVE AD**174**
(53)VAR 0.5°W - 2019
N
Annual Rate
of Change 0.16°E

COM	(*As directed by ATC)	
ATIS	124.130	HUMBERSIDE INFO
TWR	124.905, 119.130*	HUMBERSIDE TOWER
	121.600	HUMBERSIDE FIRE
LIGHTING		
THR 02/20	Hi green with elev W bars.	
RWY 02/20	Hi bi-d with LI omni-d component edge. Hi coded C/L. End lights red.	
RWY 08/26	Blue edge run off lights.	
TWY A	TWY Alpha coded C/L. Blue edge. Guard lights holding point RWY 02/20.	
TWY B	Green reflective C/L. Guard lights.	
TWY C	Blue edge lights. Guard lights.	
TWY D	Blue reflective edge.	
TWY E	Green reflective C/L.	

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
APRON / RWY / TWY	SURFACE	BEARING STRENGTH
Main Apron	Conc/Asph/Block Paved	55/F/B/X/U & 55/R/B/X/U
Southern Apron	Concrete	55/R/B/X/U
GA Apron	Asphalt	29/F/B/X/U
Light Aircraft Apron	Grass	Up to 2,500 kg
SAR Apron	Concrete	10/R/D/W/T
RWY 02	Asphalt/Concrete	47/F/B/X/T(A) 54/R/B/X/T(C)
RWY 20	Asphalt/Concrete	47/F/B/X/T(A) 54/R/B/X/T(C)
RWY 08/26	Asphalt	20/F/B/X/U
TWY A	Asphalt	55/F/B/X/U
TWY B	Asphalt	20/F/B/X/U
TWY C	Asphalt	30/F/B/X/U
TWY D	Asphalt	29/F/B/X/U
TWY E	Concrete	20/R/B/X/U
TWY Grass	Grass	Up to 2,500 kg

CHANGE (3/19): COM FREQUENCY.