


COM		
A/G	126.505	FENTON RADIO
LIGHTING		
APCH 06	300m HI coded C/L with 2 bars.	
APCH 24	900m HI coded C/L with 5 bars.	
THR 06	HI green bi-d with W bars.	
THR 24	Elev HI bi-d green with green W bars.	
RWY 06/24	Elev HI bi-d with LI omni-d component. End lights red.	

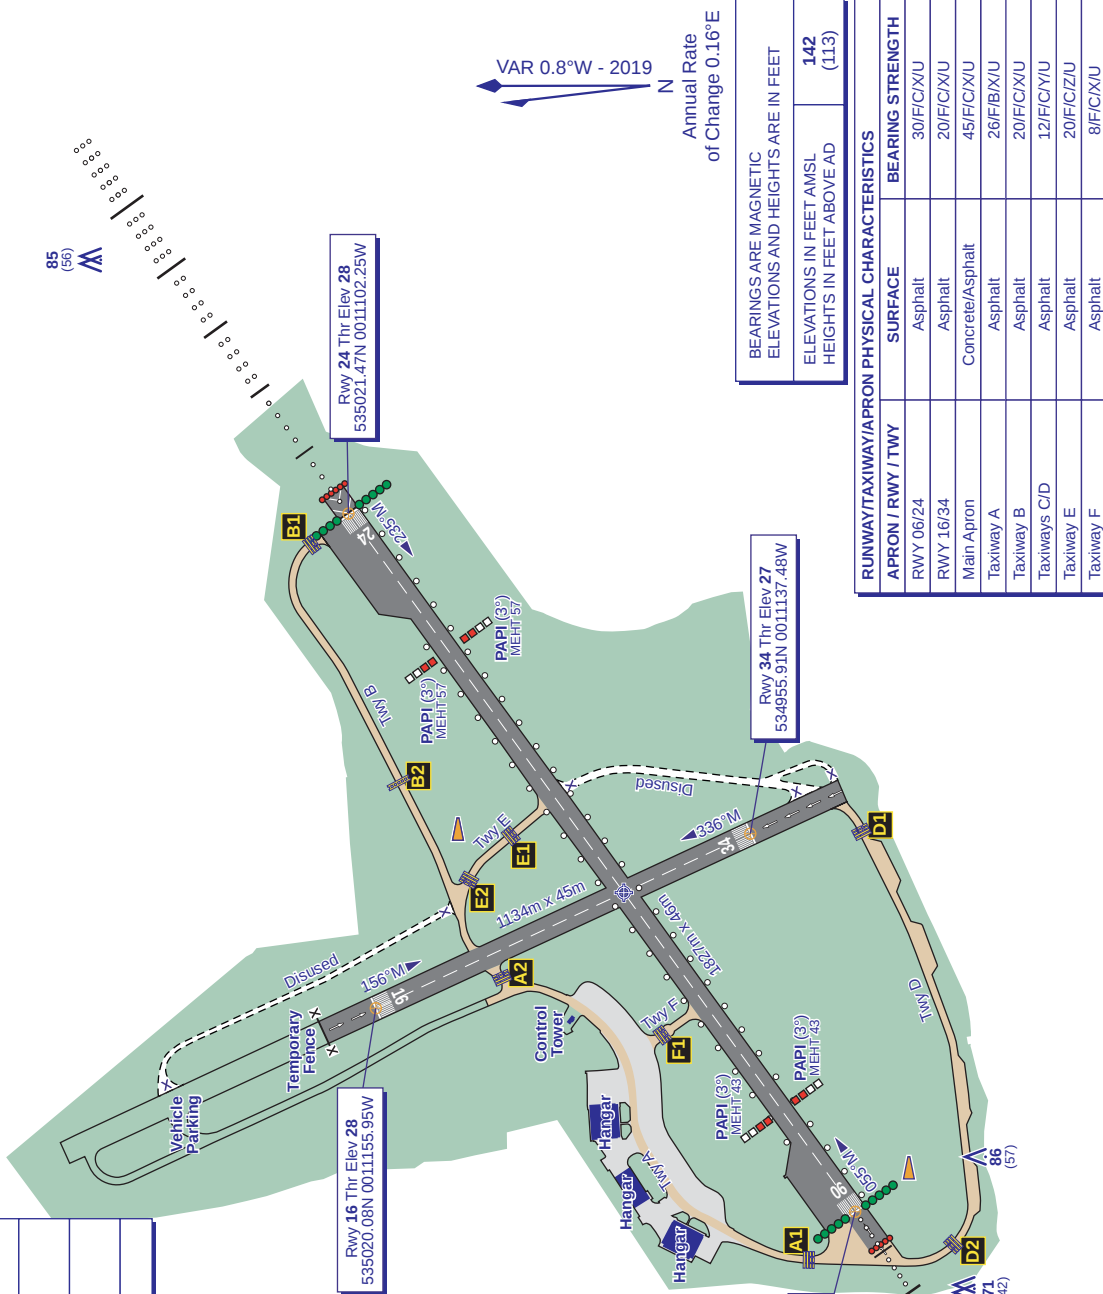

BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET		
ELEVATIONS IN FEET AMSL	142	
HEIGHTS IN FEET ABOVE AD	113	(113)

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
APRON / RWY / TWY	SURFACE	BEARING STRENGTH
RWY 06/24	Asphalt	30F/C/X/U
RWY 16/34	Asphalt	20F/C/X/U
Main Apron	Concrete/Asphalt	45F/C/X/U
Taxiway A	Asphalt	26F/B/X/U
Taxiway B	Asphalt	20F/C/X/U
Taxiways C/D	Asphalt	12F/C/Y/U
Taxiway E	Asphalt	20F/C/Z/U
Taxiway F	Asphalt	8F/C/X/U

CHANGE (219): MAG VAR/ANNUAL RATE OF CHANGE. RUNWAY HEADINGS. COM FREQUENCY. HELIPAD REMOVED. TWY C CLOSED. THRESHOLD 16 COORDINATES. RWY 16/34 DIMENSIONS.