

AERODROME CHART - ICAO

ARP 510853N 0001125W

AD ELEV 203FT

LONDON GATWICK EGKK

COM		
ATIS	136.525	GATWICK INFO
TWR	124.225, 121,500*	GATWICK TOWER *Emergency On Request
	134.225 (As directed by ATC)	
	121.950	GATWICK DELIVERY
	121.800 (GMC)	GATWICK GROUND
	121.600	GATWICK FIRE

LIGHTING	
THR 08R/26L	HI green with HI green W bars.
THR 08L/26R	HI green with W bars. RTILS synchronised flashing White.
RWY 08R	HI flush bi-d edge, red for first 393m from RWY end to displaced THR. HI colour coded C/L. HI TDZ 914m. End lights red. Stopway 74m red beyond RWY end lights. RETILS.
RWY 26L	HI flush bi-d edge, red for first 267m from RWY end to displaced THR. HI colour coded C/L. HI TDZ 914m. End lights red. Stopway 61m red beyond RWY end lights. RETILS.
RWY 08L/26R	HI flush bi-d edge with LI omni-d component. End lights red.
TWY	Green C/L. Colour coded C/L on CAT 3 exits from RWY 08R/26L. Blue edge on Taxiway Yankee from Y2 to W1.


VAR 0.1°W - 2019
N
Annual Rate
of Change 0.15°E

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
APRON / RWY / TWY	SURFACE	BEARING STRENGTH
RWY 08R/26L	Grooved Asphalt	100/F/C/W/T
RWY 08L/26R	Grooved Asphalt	100/F/C/W/T
Taxiways	Concrete	89/R/C/W/T
Taxiways	Asphalt	100/F/C/W/T
Taxiway U	Concrete	89/R/C/W/T
Taxiways V/W	Concrete	59/R/D/W/T
Taxiways T/Y	Concrete/Asphalt	55/R/C/W/T
Apron - Parking Stands	Concrete	89/R/C/W/T
Apron - Parking Stands	Concrete Block Paving	100/F/C/W/T

GUND (Geoid Undulation) =
The height of the Geoid (MSL) above the
Reference Ellipsoid (WGS 84) at the stated position.

BEARINGS ARE MAGNETIC
ELEVATIONS AND HEIGHTS ARE IN FEET

ELEVATIONS IN FEET AMSL	326 (123)
HEIGHTS IN FEET ABOVE AD	

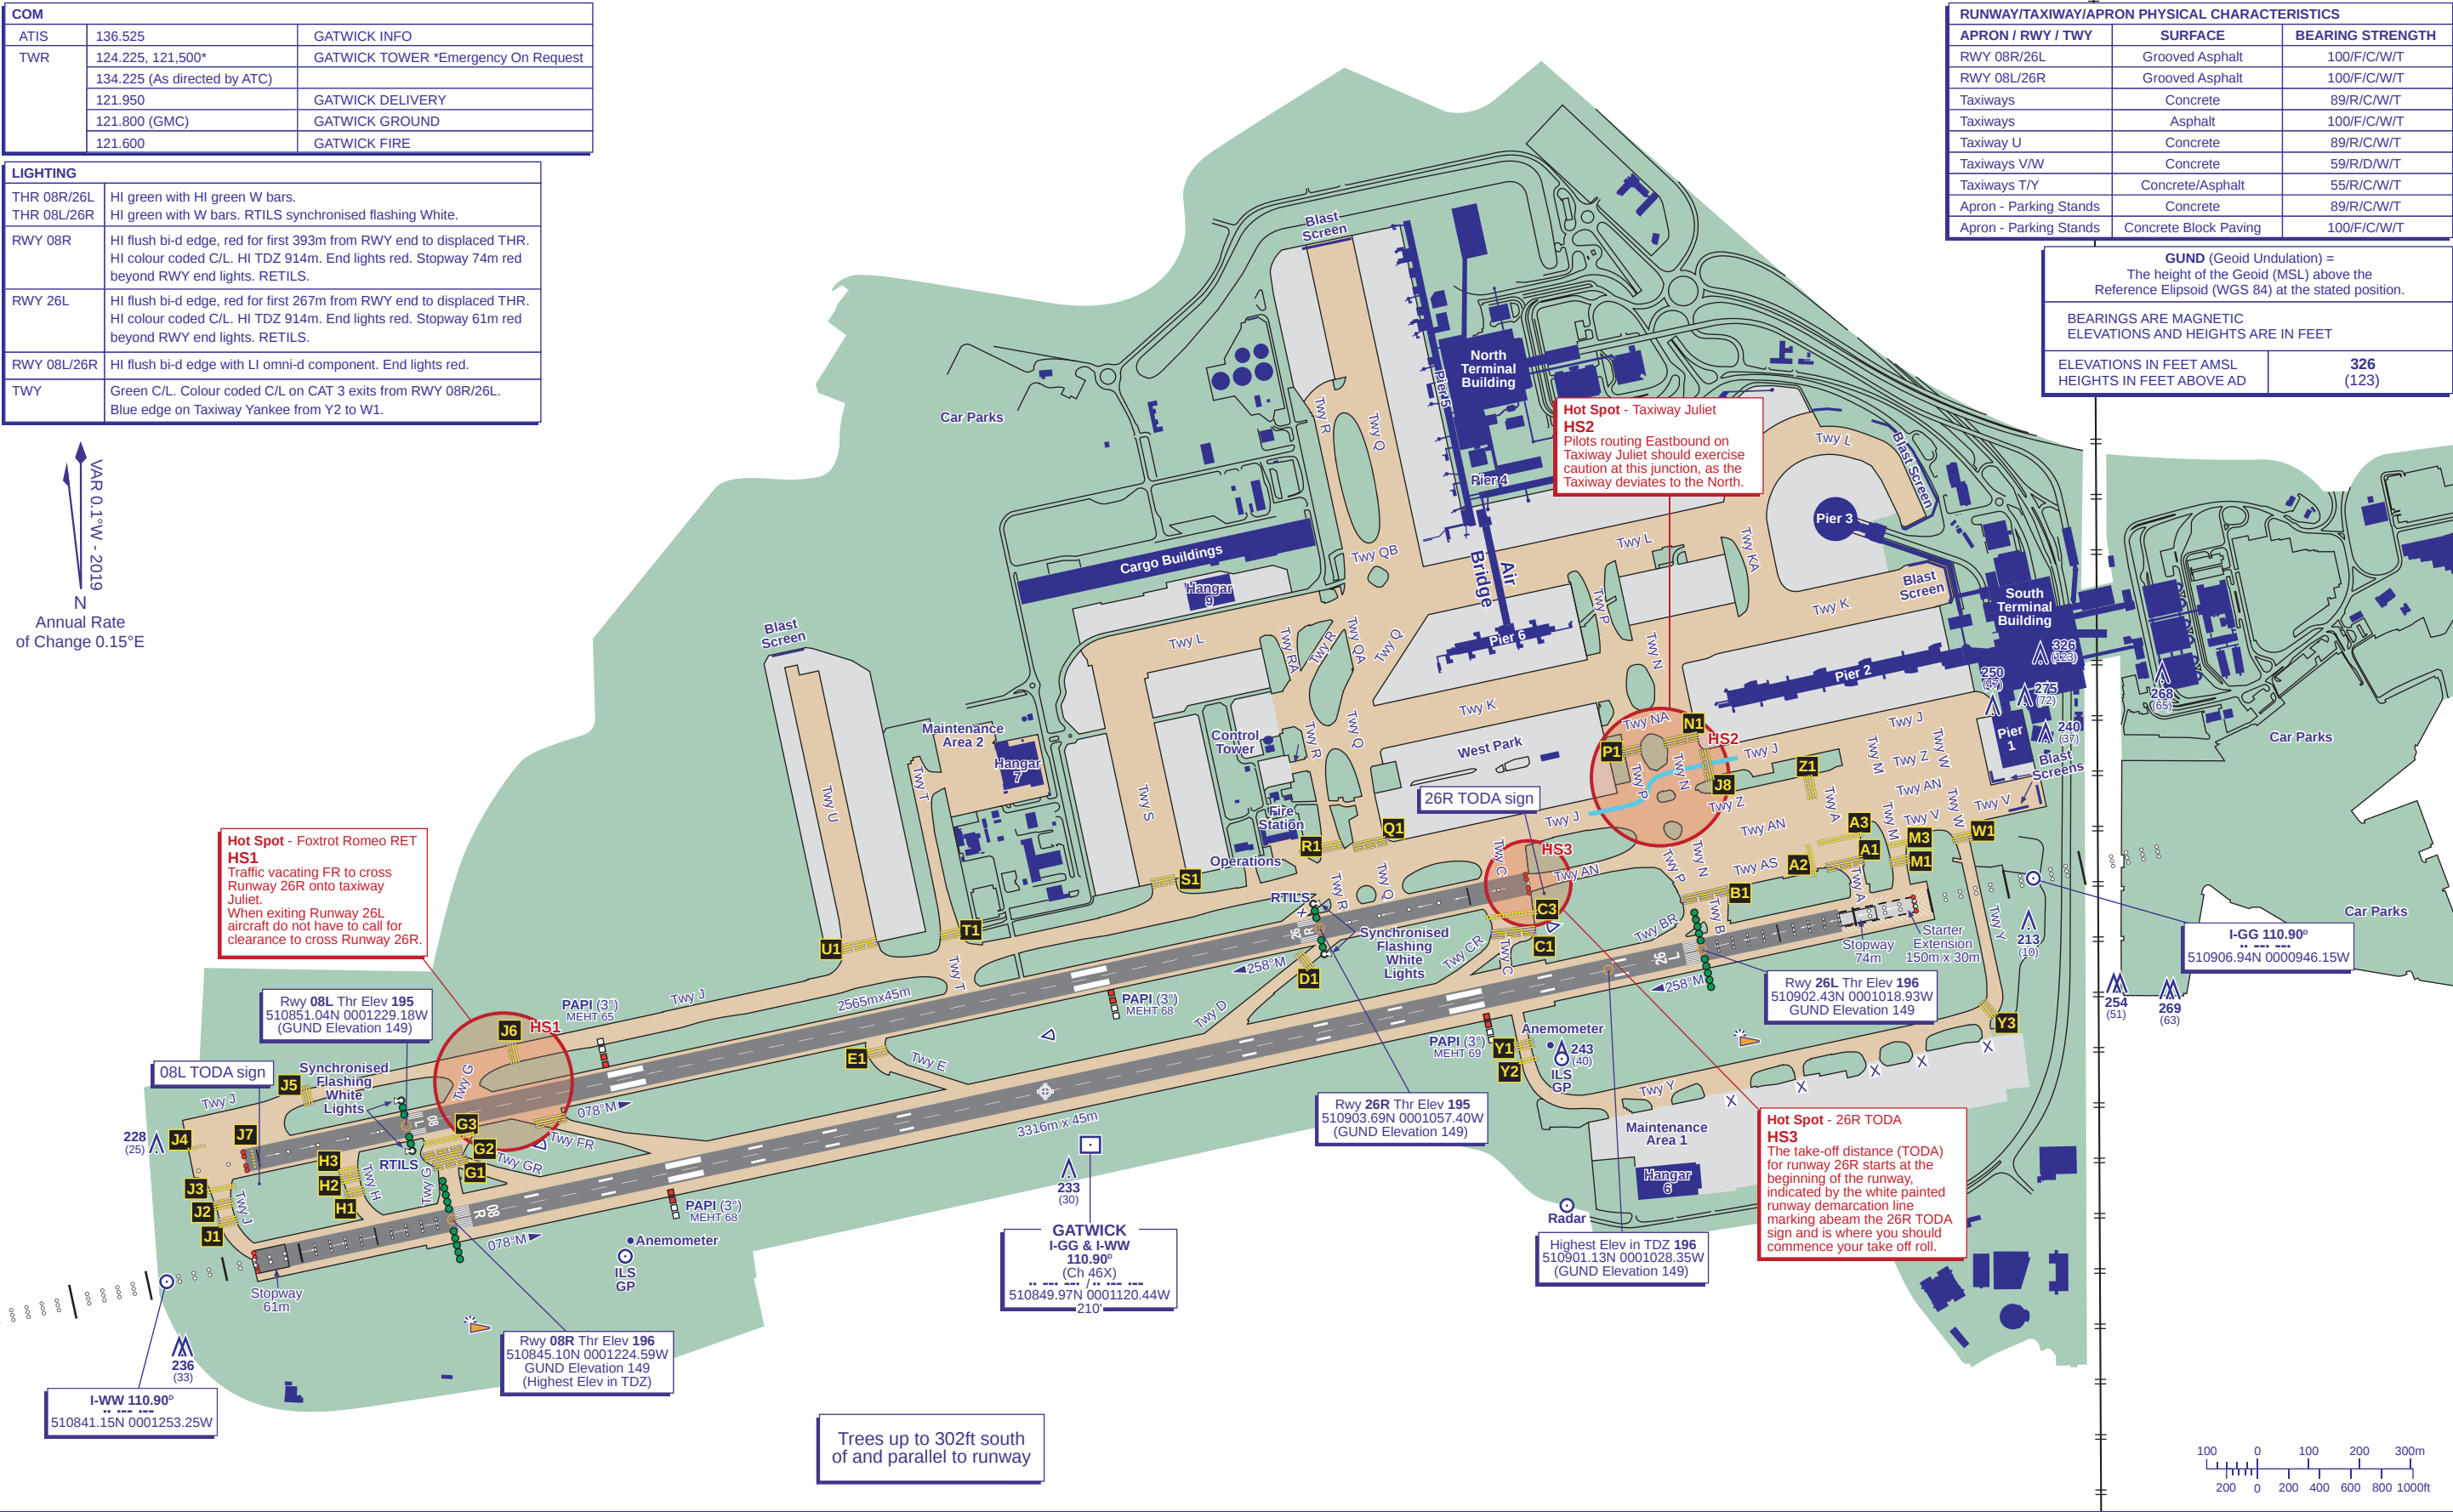

CHANGE (2/19): HOLD Z1 ADDED.

AERO INFO DATE 1 NOV 18

AD 2-EGKK-2-1