
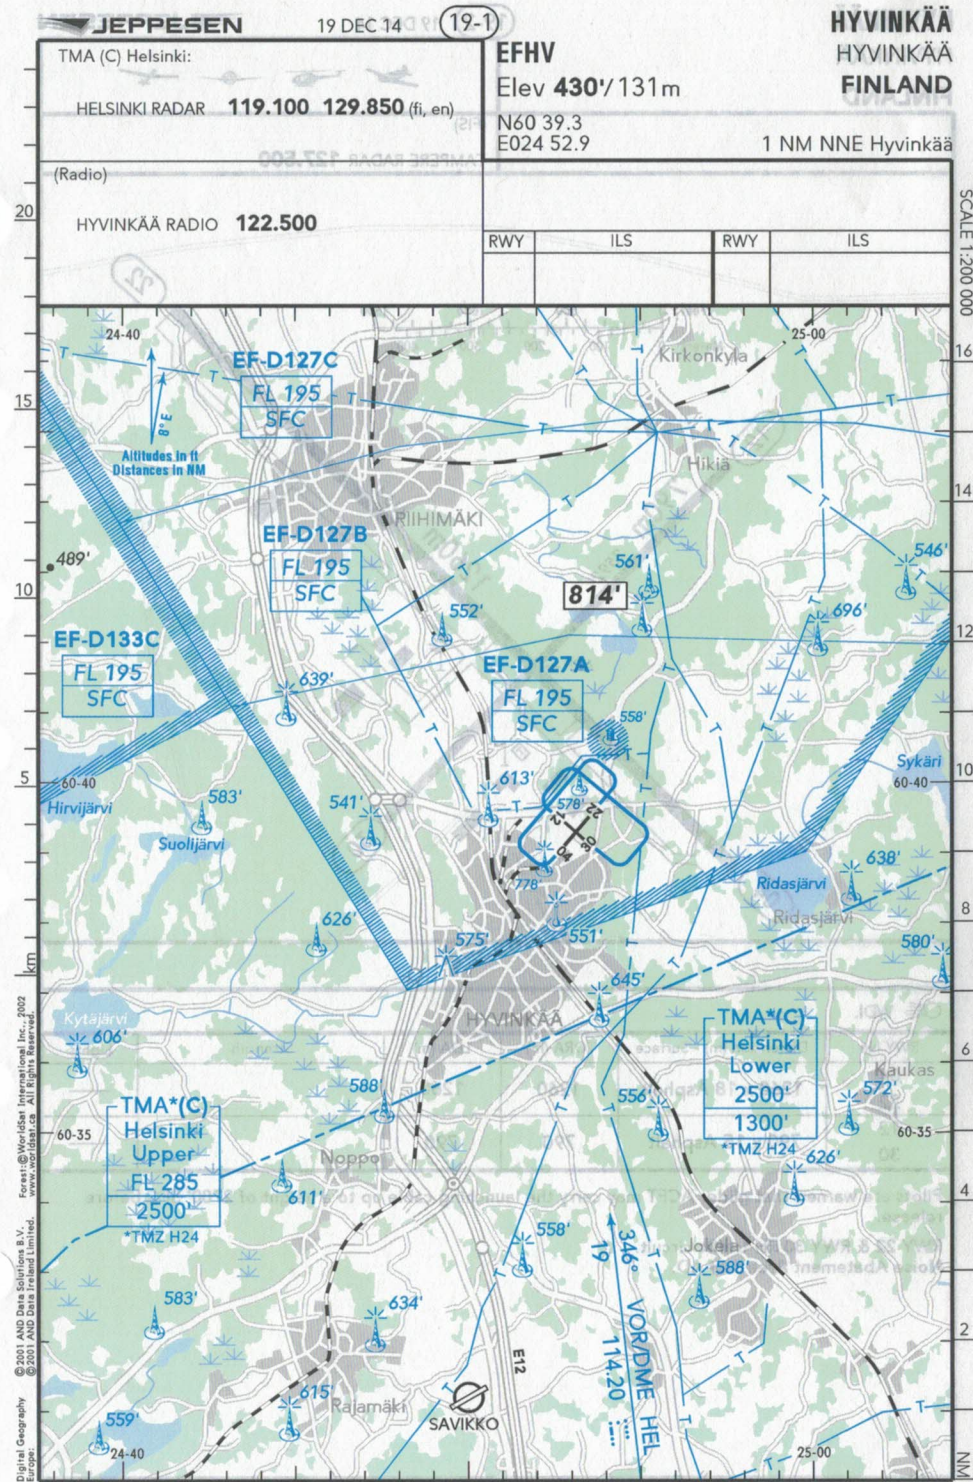


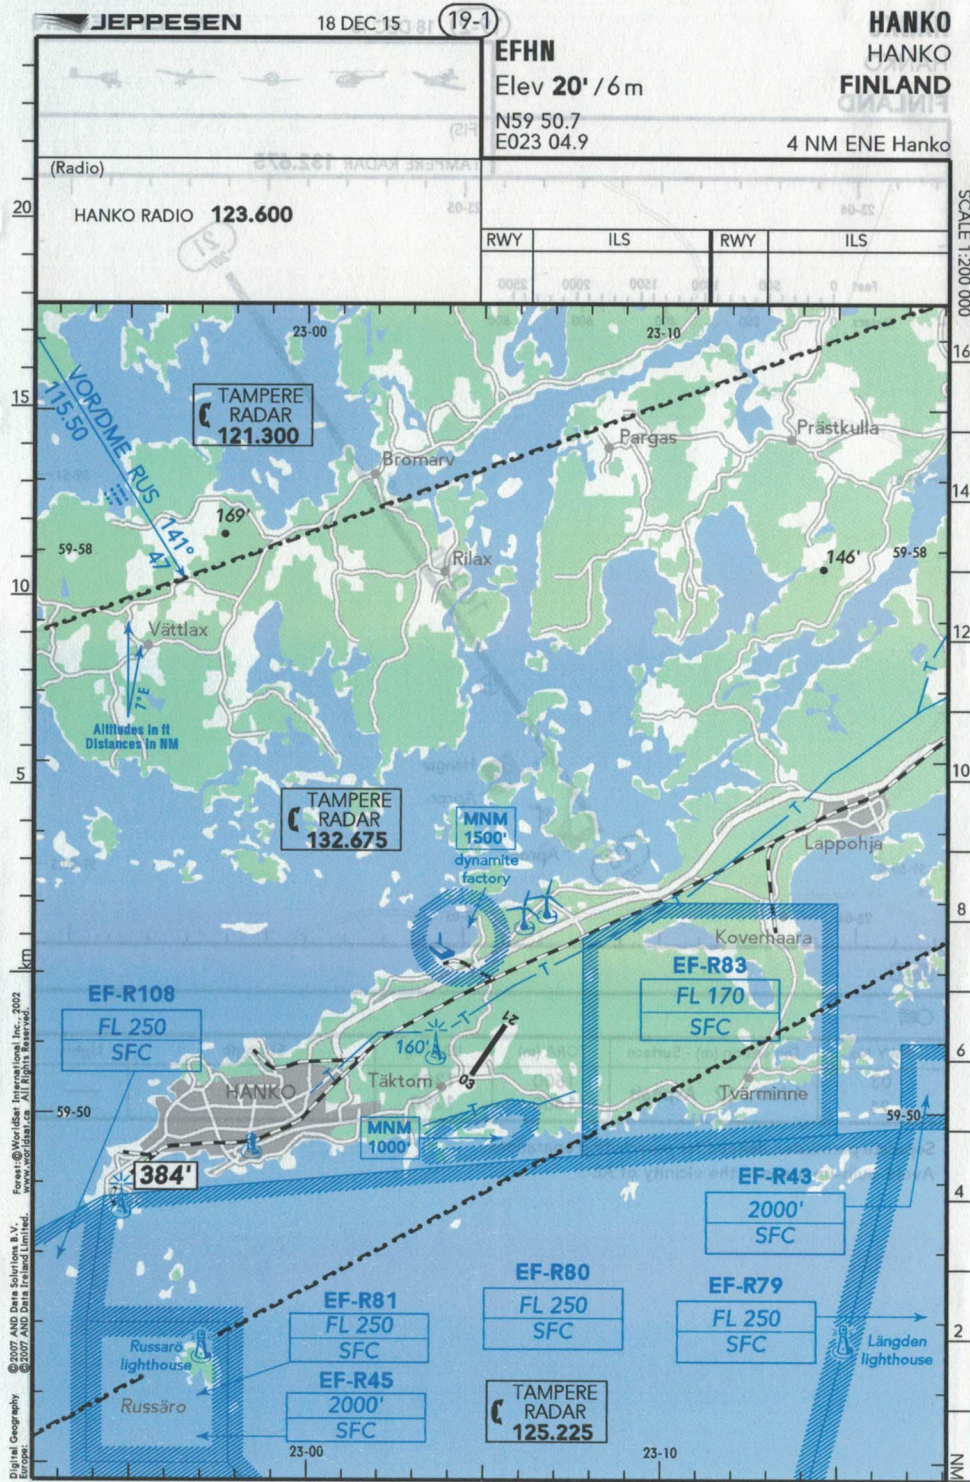

HYVINKÄÄ HYVINKÄÄ FINLAND


19-2 19 DEC 14

JEPPESEN

(FIS)

TAMPERE RADAR 127.500

Feet 0 500 1000 1500
Meters 0 100 200 300 400

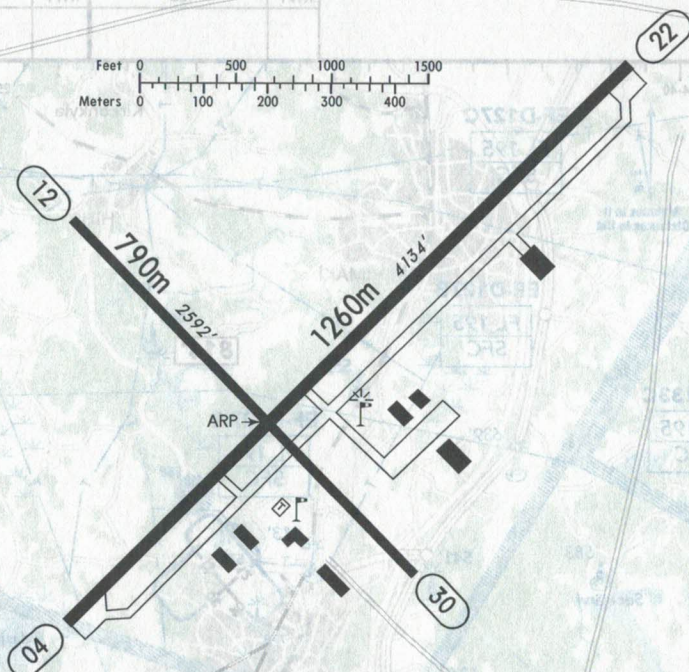

WDI.

RWY No	Dimension (m) - Surface	TORA (m)	LDA (m)	Strength	Lights
04 22	1260 x 18 Asphalt	1260	1260		—
12 30	790 x 15 Asphalt	790	790		—

Pilots are warned that glider ACFT may carry the launching cable up to a height of 2700' SFC before release.

RWY 22 & RWY 30 RH traffic circuit.
Noise Abatement Area S of AD.

HANKO HANKO FINLAND


19-2 18 DEC 15

JEPPESEN

(FIS)

TAMPERE RADAR 132.675

Feet 0 500 1000 1500 2000 2500
Meters 0 200 400 600 800

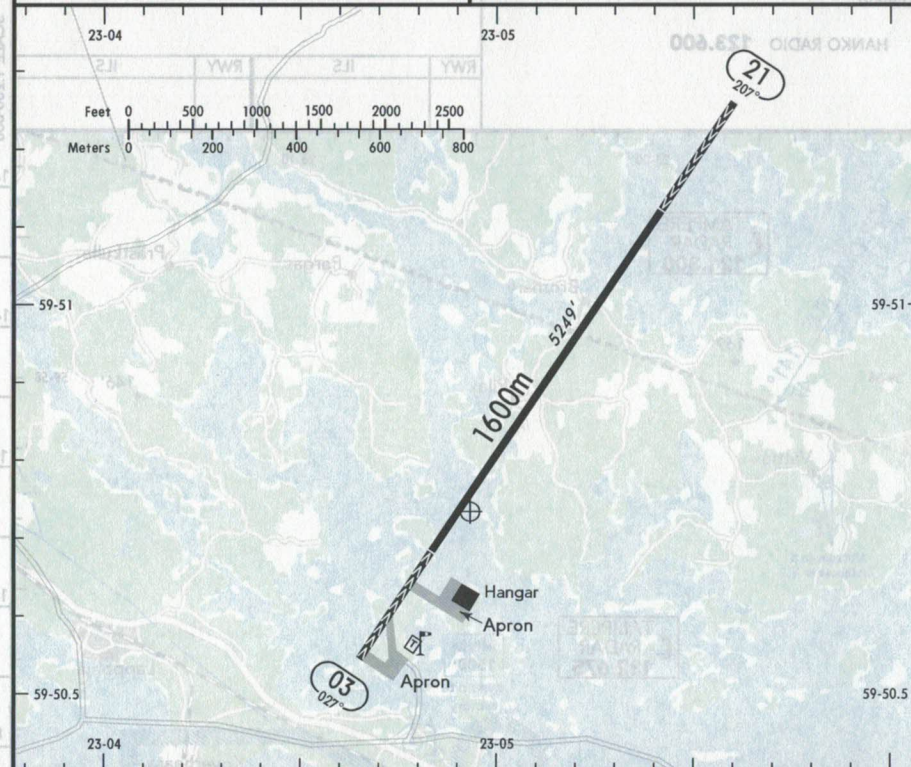

TAXI

WDI.

RWY No	Dimension (m) - Surface	TORA (m)	LDA (m)	Strength	Lights
03 21	1600 x 12 Asphalt	1600 1600	1300 1290		—

Separate permission needed for parachuting operations.
Avoid built-up areas in the vicinity of AD.