

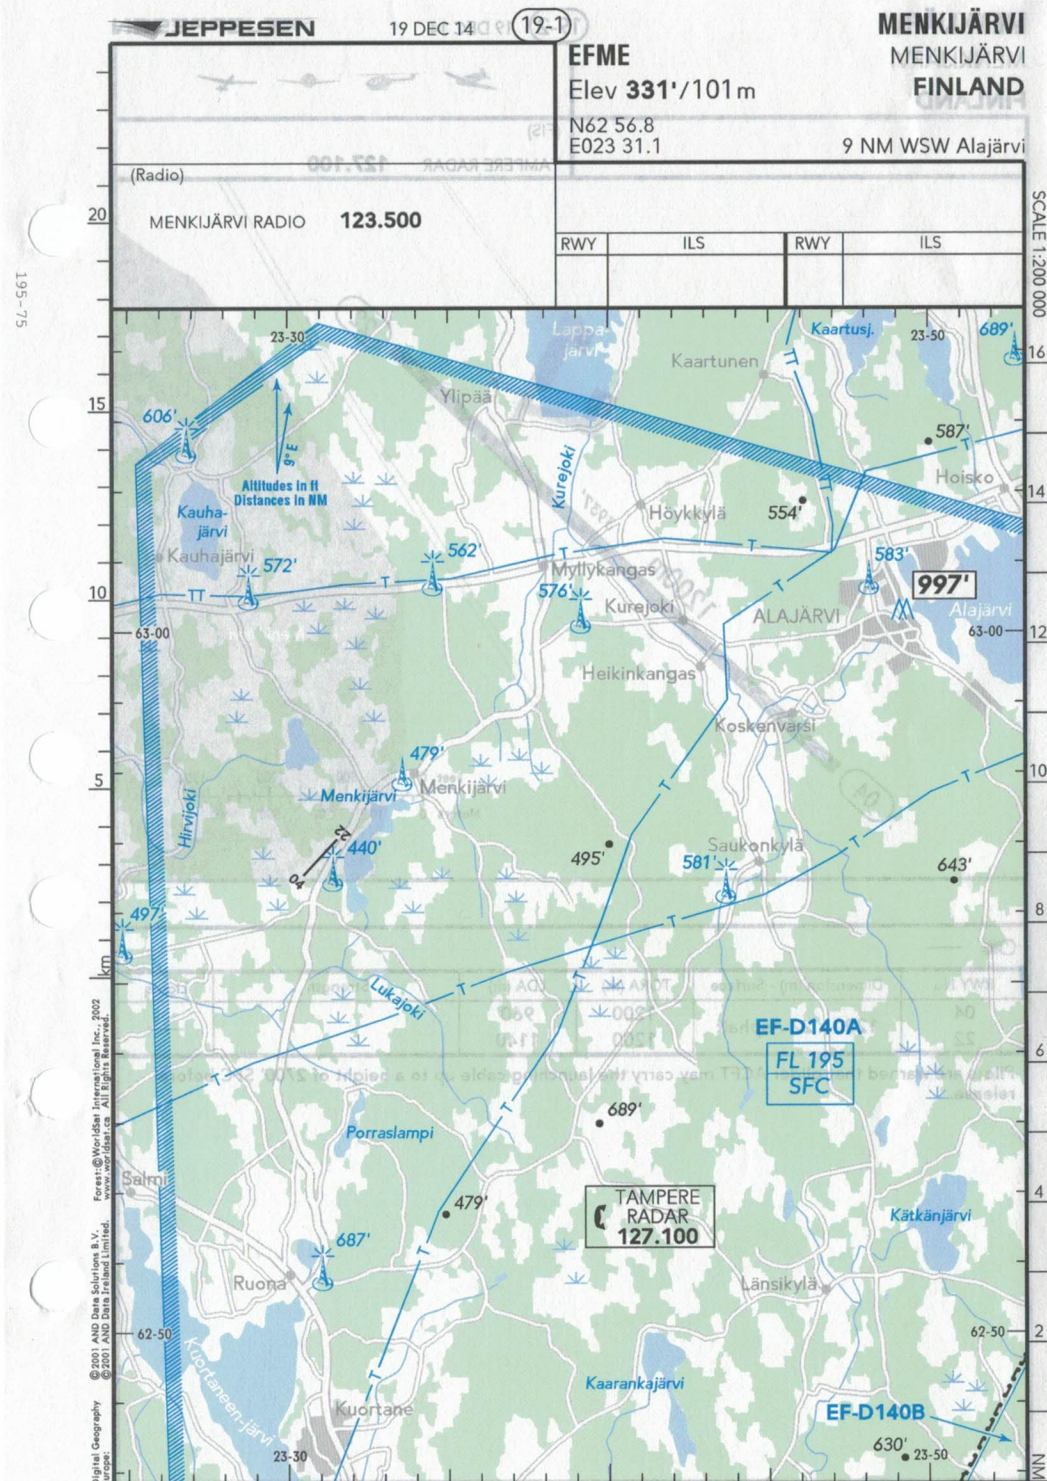


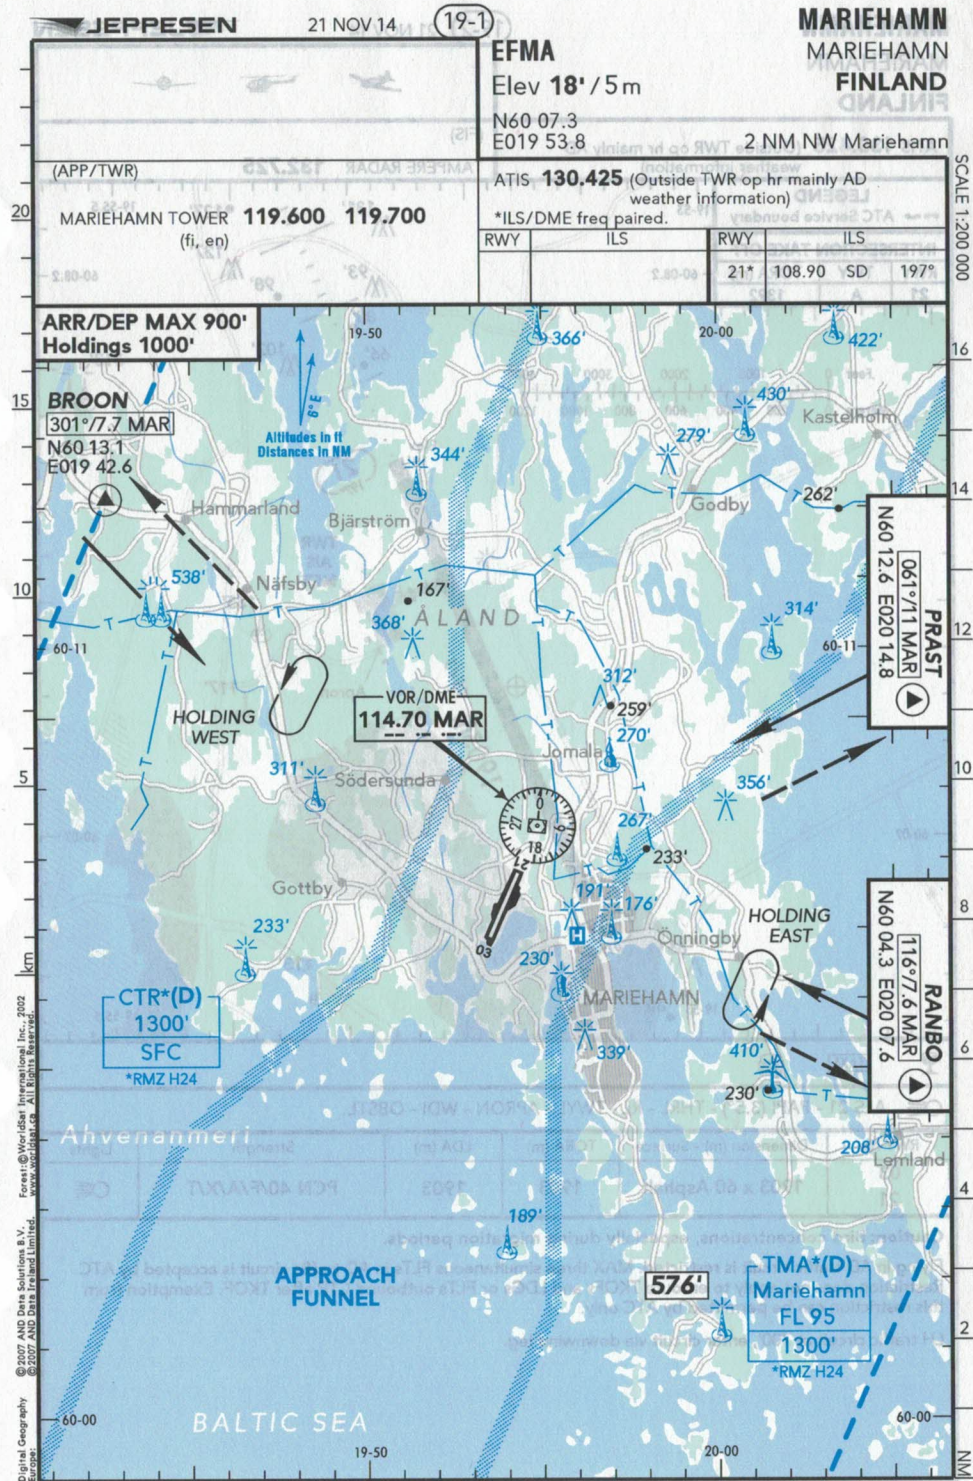

MENKIJÄRVI MENKIJÄRVI FINLAND

19-2 19 DEC 14

JEPPESSEN

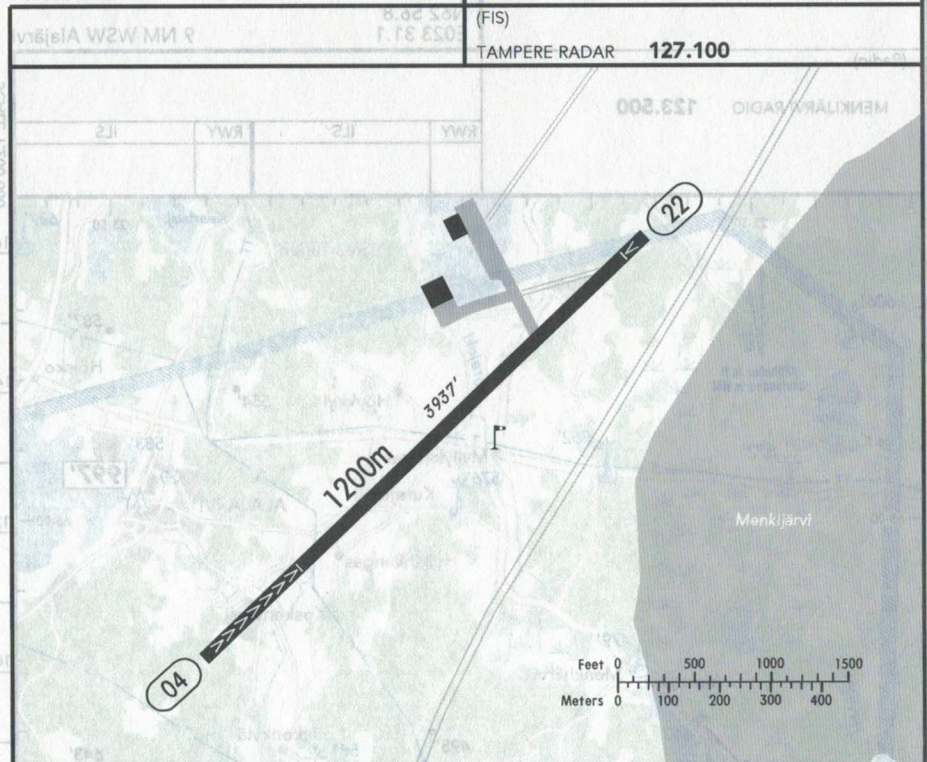


RWY No	Dimension (m) - Surface	TORA (m)	LDA (m)	Strength	Lights
04	1200 x 22 Asphalt	1200	960		
22		1200	1140		

Pilots are warned that glider ACFT may carry the launching cable up to a height of 2700' SFC before release.

MARIEHAMN MARIEHAMN FINLAND

19-2 21 NOV 14

JEPPESSEN

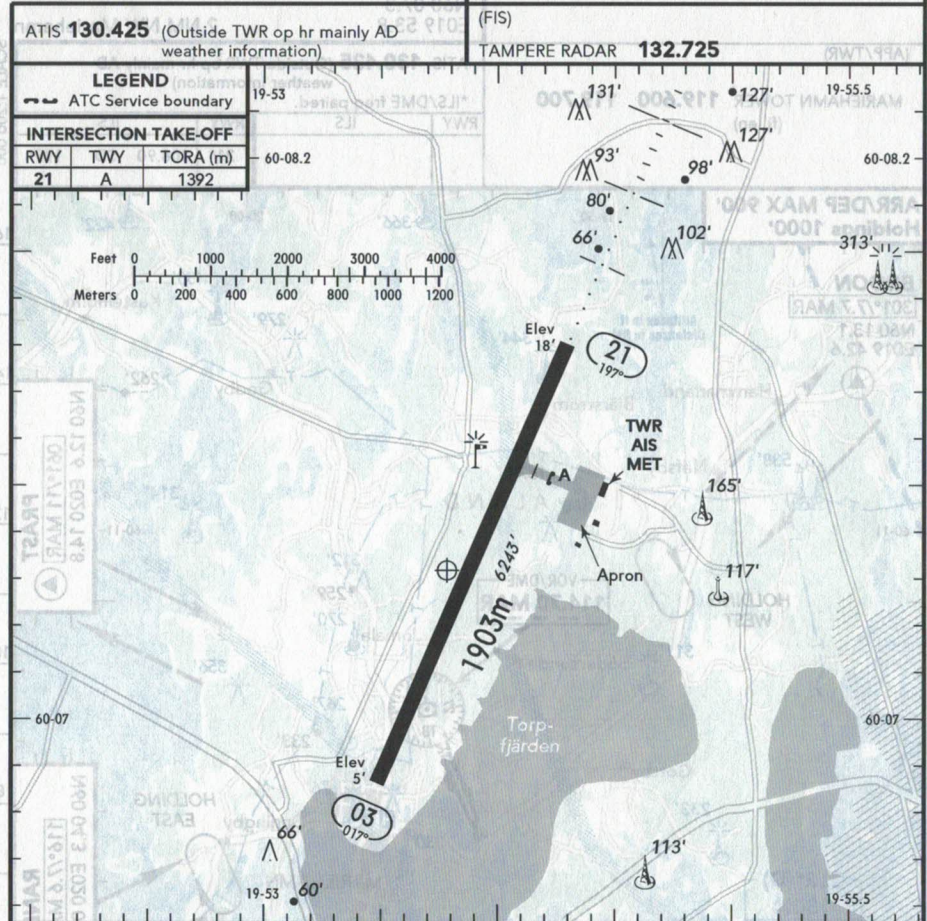

RWY No	Dimension (m) - Surface	TORA (m)	LDA (m)	Strength	Lights
03	1903 x 60 Asphalt	1903	1903	PCN 40/F/A/X/T	
21					

Caution: Bird concentrations, especially during migration periods.

Flying in AD traffic circuit is restricted. MAX three simultaneous FLT's in AD traffic circuit is accepted by ATC. Restriction does not apply to enroute TKOFs and LDGs or FLT's outbound CTR after TKOF. Exemption from this restriction can be permitted by ATC only.

LH traffic circuit at 700', enter circuit via downwind leg.